US 20140190168A1

(19) **United States**

(12) **Patent Application Publication**

(10) **Pub. No.: US 2014/0190168 A1**

(43) **Pub. Date: Jul. 10, 2014**

Shershnyov et al.

(54) **DUAL FUEL NOZZLE TIP ASSEMBLY**

(71) Applicant: **General Electric Company**, Schenectady, NY (US)

(72) Inventors: **Borys Borysovych Shershnyov**, Moscow (RU); **Leonid Yulyevich Ginessin**, Moscow (RU)

(73) Assignee: **General Electric Company**, Schenectady, NY (US)

(21) Appl. No.: **14/077,557**

(22) Filed: **Nov. 12, 2013**

(30) **Foreign Application Priority Data**

Jan. 10, 2013 (RU) 2013102451

Publication Classification

(51) **Int. Cl.**

F23R 3/28 (2006.01)

F23R 3/14 (2006.01)

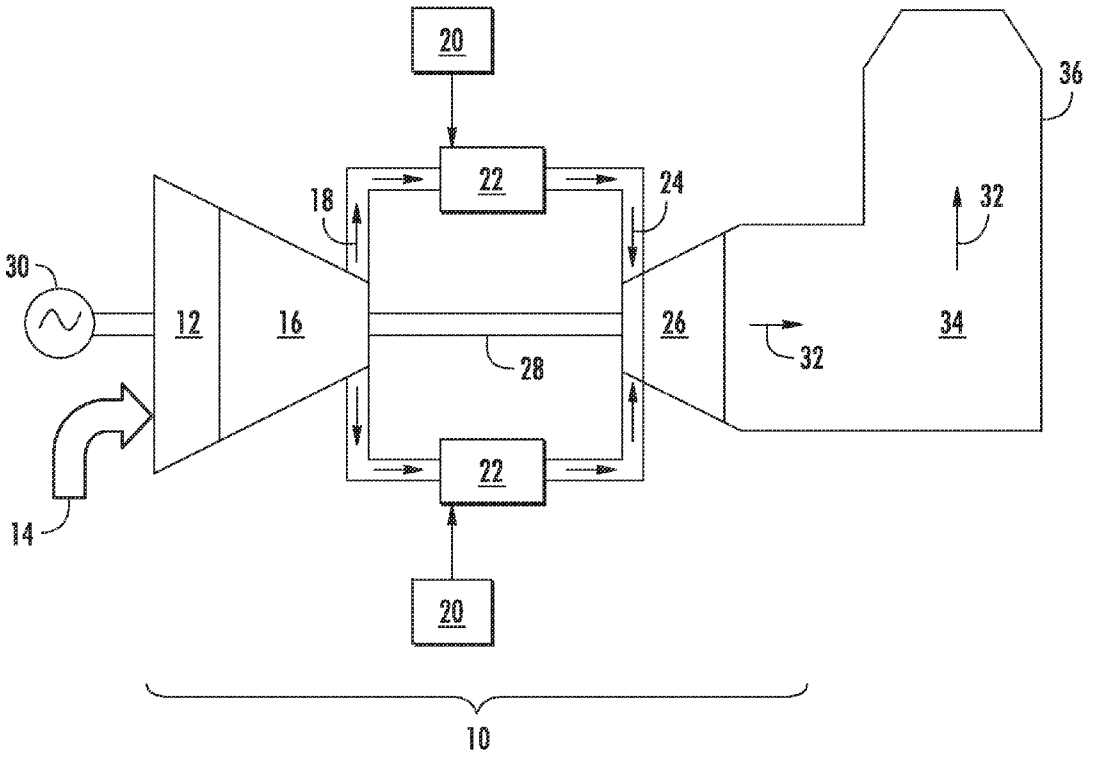
(52) **U.S. Cl.**

CPC .. ***F23R 3/283*** (2013.01); ***F23R 3/14*** (2013.01)

USPC **60/737**

(57) **ABSTRACT**

A fuel nozzle for a combustor includes a burner tube and a center nozzle assembly disposed within the burner tube. The center nozzle assembly includes a center body that at least partially defines a cooling air flow passage through the center nozzle assembly. A premix flow passage is defined between the burner tube and the center nozzle assembly. A tip assembly is disposed at a downstream end of the center body. The tip assembly includes an impingement plate, and a cap that is disposed downstream from the impingement plate. The impingement plate and the cap at least partially define a cooling plenum therebetween. An insert passage extends through the impingement plate and a cooling flow outlet extends through the cap. A plurality of cooling ports extends through the impingement plate to provide for fluid communication between the cooling air flow passage and the cooling plenum.



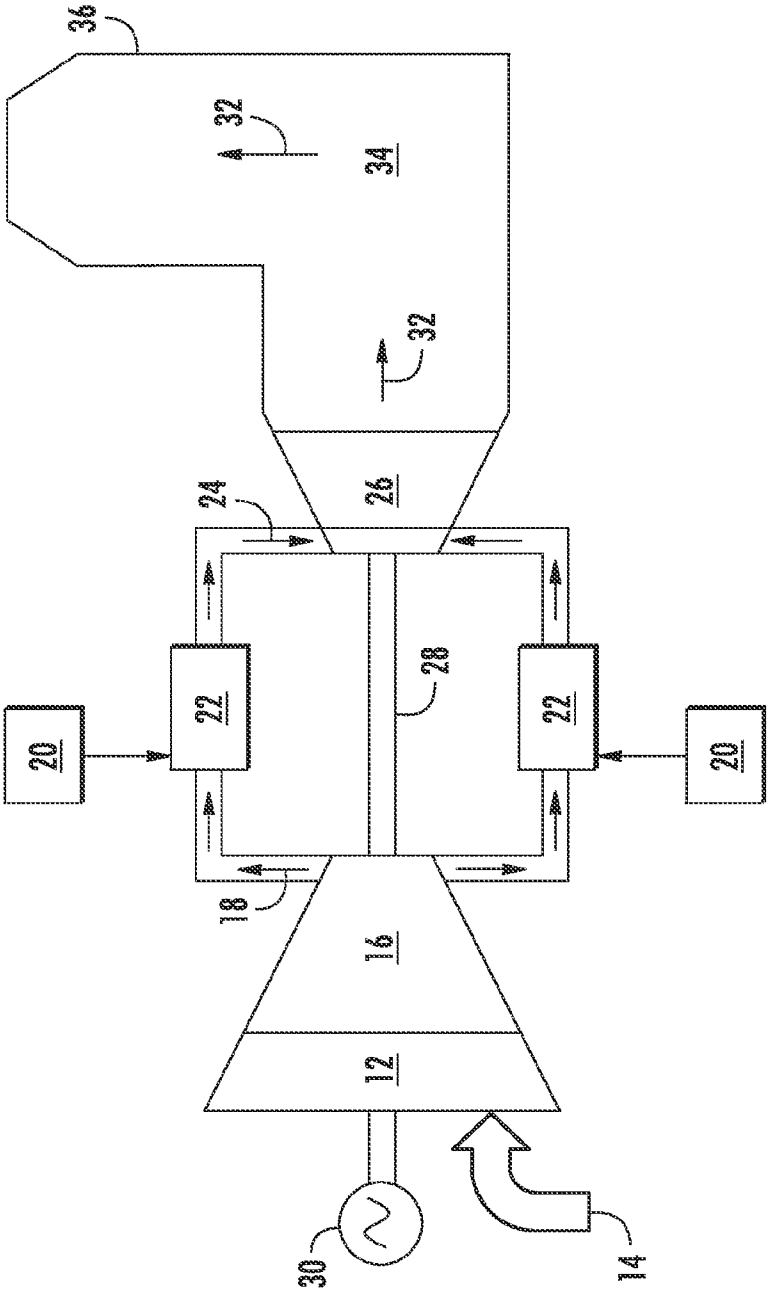


FIG. 1
PRIOR ART

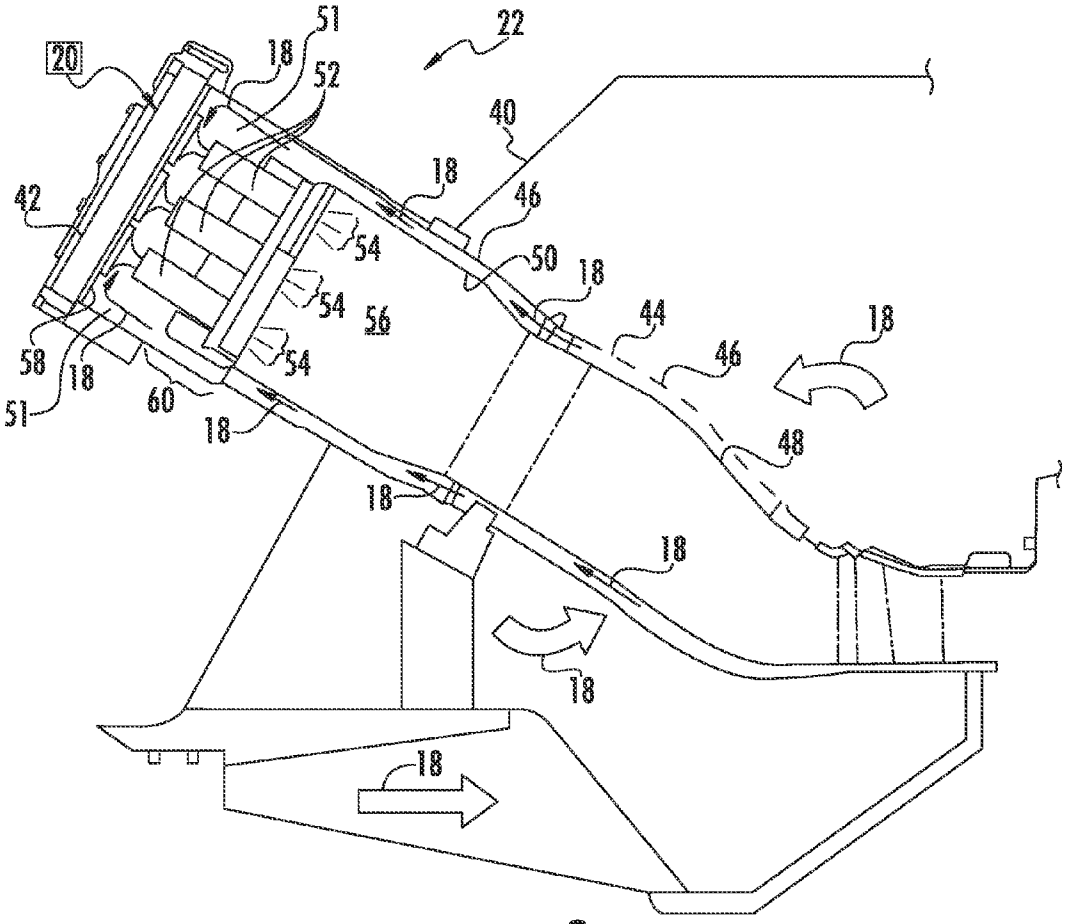

20
51
18
52
22
40
42
18
46
54
50
18
54
56
44
18
58
18
54
46
51
60
18
48
18
18
18
18
18

FIG. 2

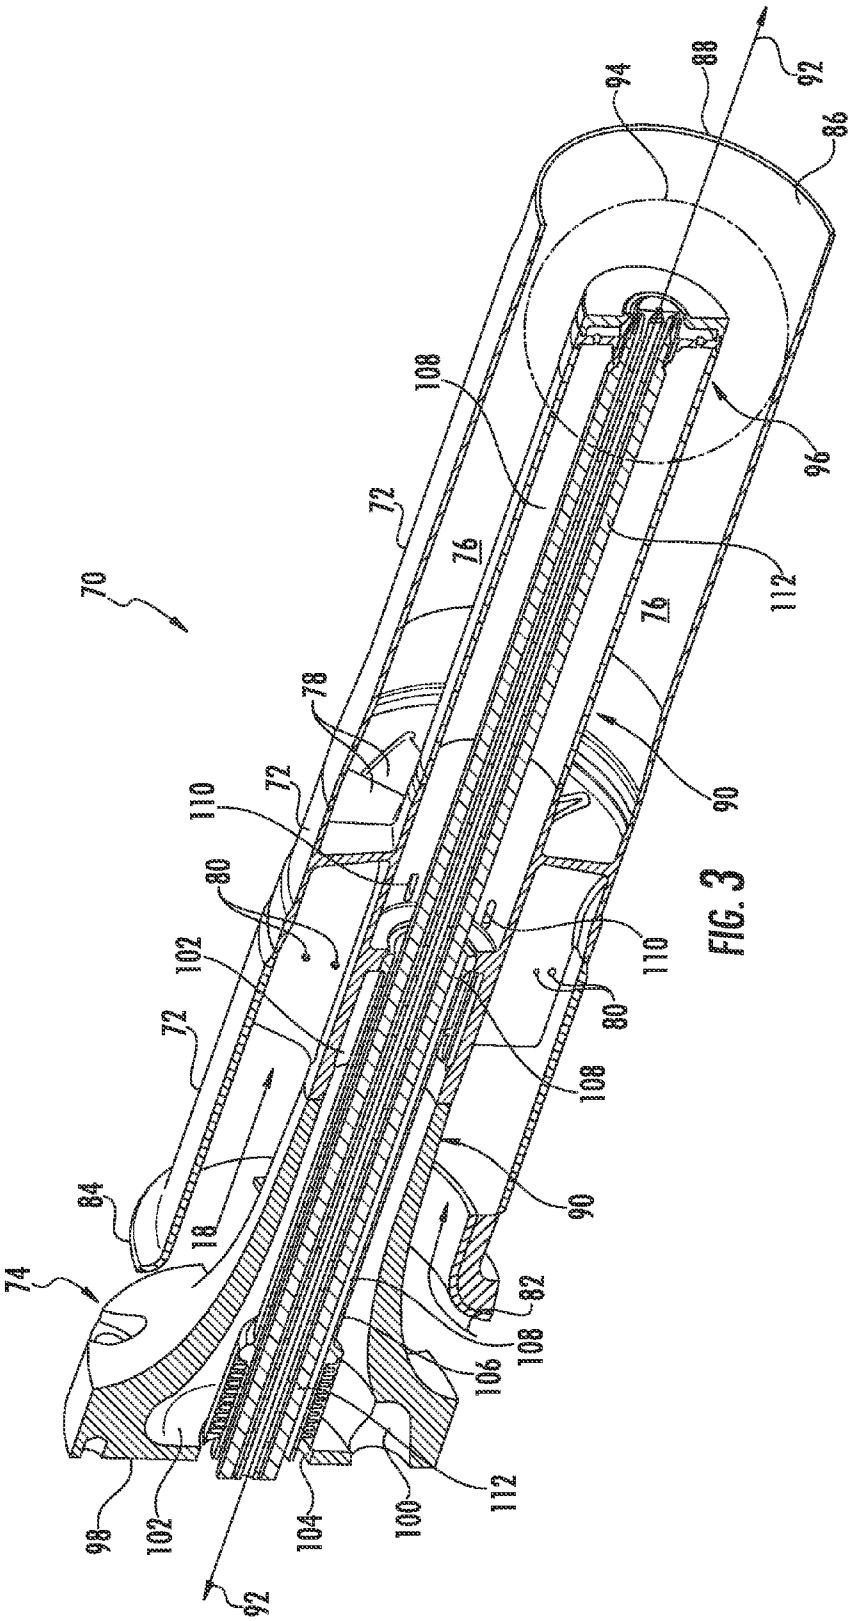

70
72
74
76
78
80
82
84
86
88
90
92
94
96
98
100
102
104
106
108
110
112
18

FIG. 3

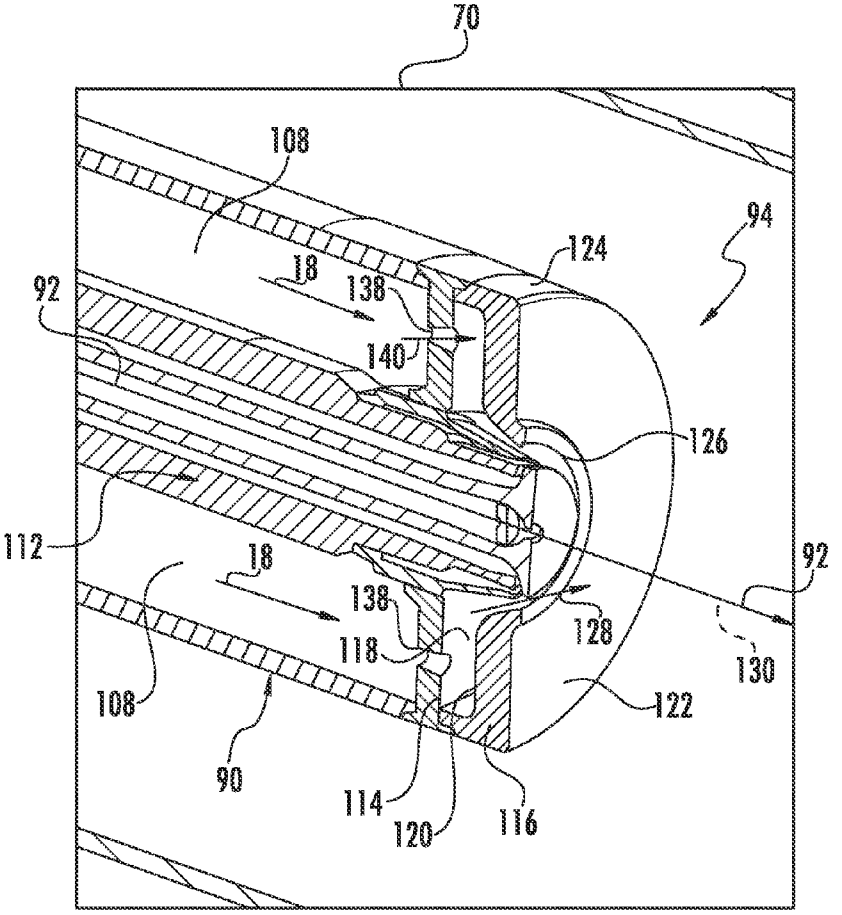

70
108
94
124
18
138
92
140
126
112
18
92
138
128
118
130
108
122
90
114
120
116

FIG. 4

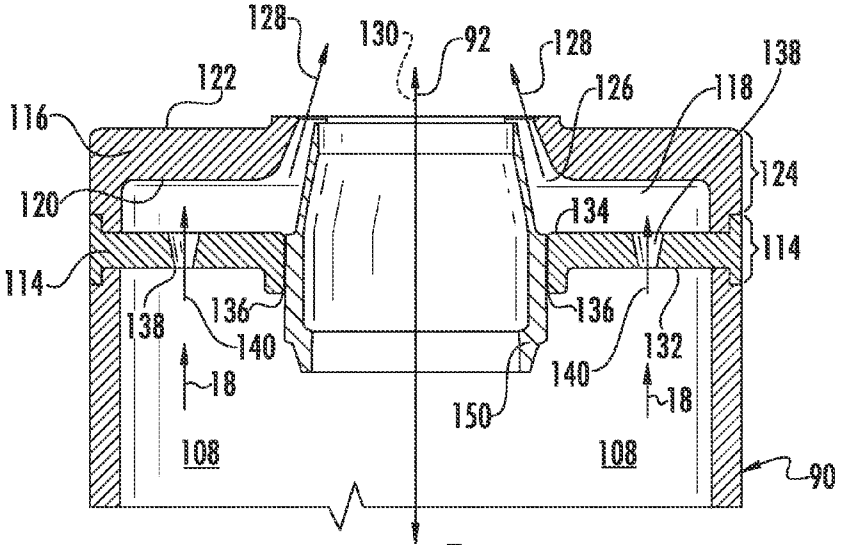

128
130
92
128
138
122
126
118
116
124
120
134
114
114
138
136
136
140
132
140
18
18
150
108
108
90

FIG. 5

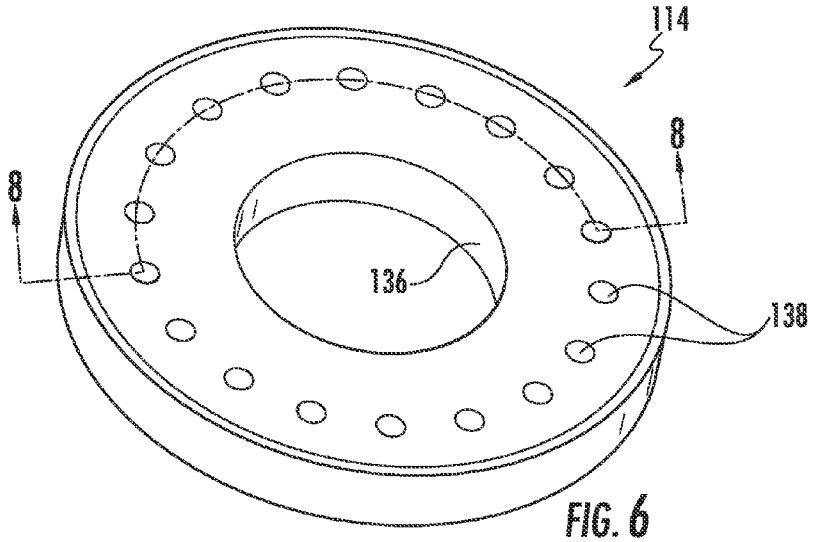


FIG. 6

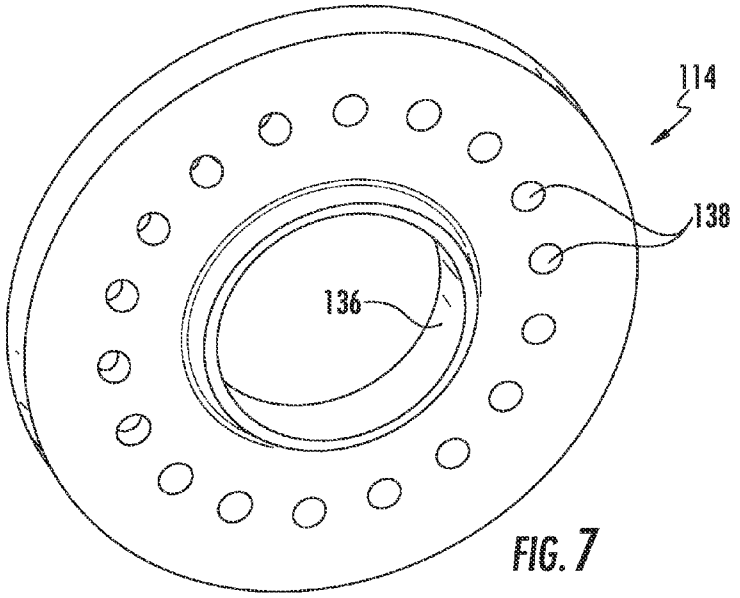


FIG. 7

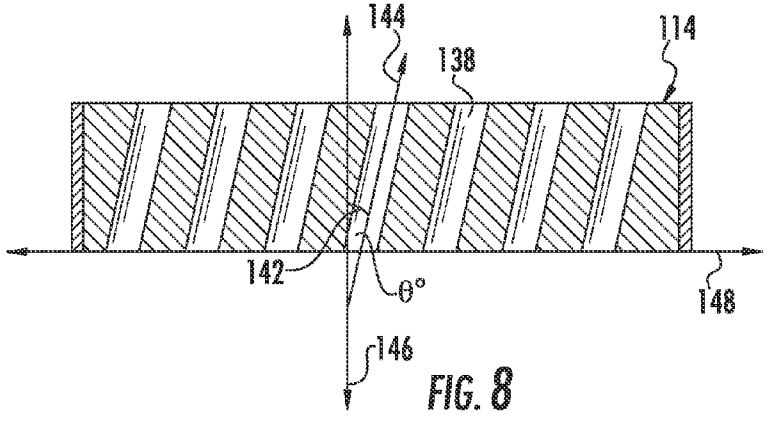


FIG. 8

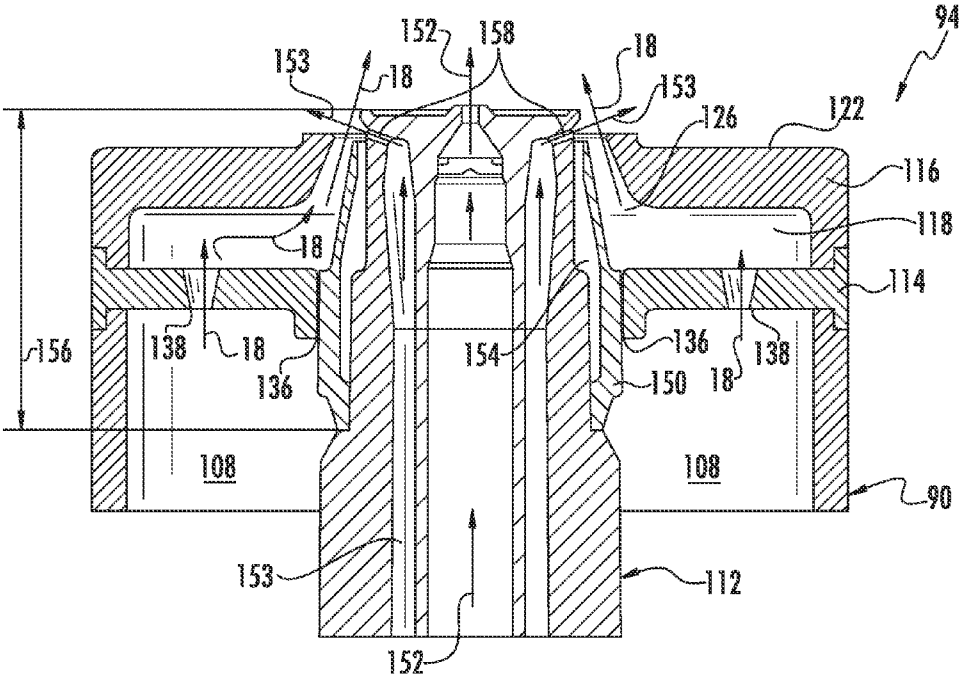

94
152
158
153
18
153
18
126
122
116
118
114
156
138
18
136
154
150
136
138
108
108
90
153
112
152

FIG. 9

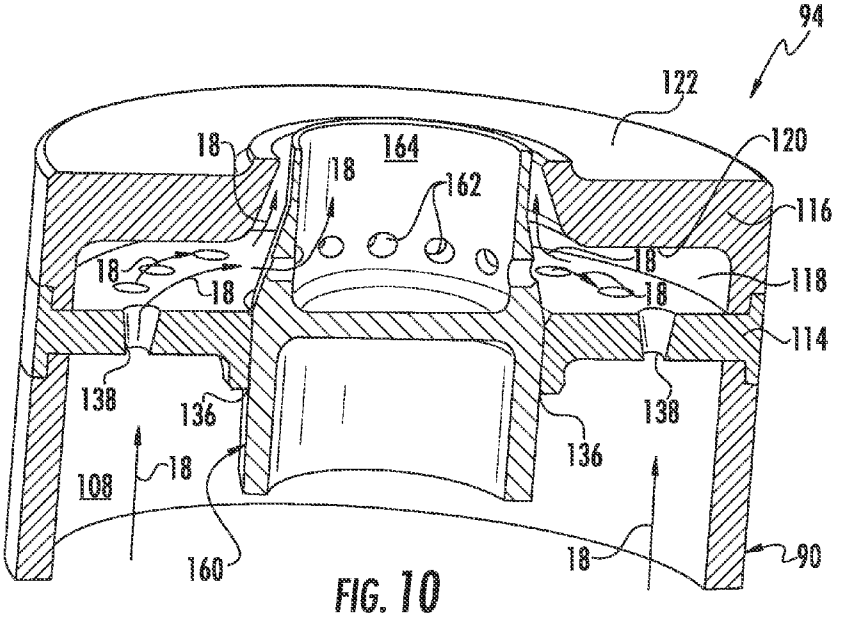

94
122
120
18
164
18
162
116
18
18
118
18
114
138
136
138
136
108
18
160
18
90

FIG. 10

DUAL FUEL NOZZLE TIP ASSEMBLY

FIELD OF THE INVENTION

[0001] The present invention generally involves a fuel nozzle for a combustor. More specifically, the invention relates to a center body tip assembly for a dual-fuel fuel nozzle for a combustor of a gas turbine.

BACKGROUND OF THE INVENTION

[0002] In a gas turbine, fuel nozzles are used to mix a compressed working fluid such as air with a fuel for combustion within a combustion zone that is positioned downstream from the fuel nozzles. Some fuel nozzles are configured to operate on one type of fuel such as a gas fuel during gas fuel operation mode and on a second type of fuel such as a liquid fuel during liquid fuel operation mode. Where a liquid fuel is used for diffusion mode operation, coking forms and high thermal stresses occur at a central body tip portion of the fuel nozzle.

[0003] A particular fuel nozzle configuration that is capable of both gas and liquid mode operation generally includes an outer premix flow passage that is at least partially defined by a burner tube and a plurality of swirler vanes that extend radially inward from the burner tube into the premix flow path. The fuel nozzle further includes a central body that is coaxially aligned with the burner tube and that extends at least partially through the burner tube. The central body defines a recirculation zone for flame stabilization in a central area of a combustion zone that is downstream from the fuel nozzle. A liquid fuel cartridge (LFC) extends at least partially through the central body and/or the burner tube and/or the premix flow passage. The LFC being coaxially aligned with the burner tube. A LFC tip assembly is at least partially disposed within the center body. The LFC tip assembly includes a liquid fuel injector that is disposed at a downstream end of the center body and generally adjacent to an outlet of the premix flow passage. The liquid fuel injector tip is generally adjacent to the combustion zone of the combustor.

[0004] The LFC tip and/or the LFC tip assembly provide a mechanism for generating a flame using a liquid fuel during startup and operation of the combustor. However, because of the proximity of the LFC tip with respect to the combustion zone of the combustor, heat from the combustion gases and/or heat due to heating during premix mode operation may damage the center body tip over time. In addition, in certain configurations where the fuel nozzle is configured to flow both the gas fuel and the liquid fuel, the liquid fuel causes coke deposit formation or coking on a heated downstream surfaces of the center body tip. Current designs use a curtain of air that is routed through the center body to cool the center body tip. However, despite the general effectiveness of this system and/or method for cooling the nozzle tip, center body tips are still a life limiting component of this type of fuel nozzle. Therefore, a center body tip assembly with an improved system and/or method for cooling the center body tip would be useful in the industry.

BRIEF DESCRIPTION OF THE INVENTION

[0005] Aspects and advantages of the invention are set forth below in the following description, or may be obvious from the description, or may be learned through practice of the invention.

[0006] One embodiment of the present invention is a fuel nozzle for a combustor. The fuel nozzle includes a burner tube component and a center nozzle assembly concentrically disposed within the burner tube component. The center nozzle assembly includes a center body that at least partially defines a cooling air flow passage through the center nozzle assembly. The center body further includes a downstream end. A premix flow passage is defined between the burner tube component and the center nozzle assembly. A central recirculation zone for premix flame stabilization is defined in the area of combustion zone downstream from the center body. A tip assembly is disposed at the downstream end of the center body. The tip assembly includes an impingement plate that extends radially across the downstream end of the center body, and a radially extending cap that is disposed downstream from the impingement plate. The impingement plate and the cap at least partially define a cooling plenum therebetween. An insert passage extends through the impingement plate. A cooling flow outlet extends through the cap. The cooling flow outlet is coaxially aligned with the insert passage. A plurality of cooling ports extends through the impingement plate to provide for fluid communication between the cooling air flow passage and the cooling plenum.

[0007] Another embodiment of the present invention is a tip assembly for a fuel nozzle. The tip assembly includes an annular impingement plate that at least partially defines an insert passage that extends concentrically through the impingement plate along a longitudinal axis of the diffusion tip assembly. An annular cap is disposed coaxially downstream from the impingement plate. The cap at least partially defines a cooling flow outlet that is aligned with the insert passage. The cap includes an outer portion that extends between the impingement plate and the cap. The outer portion, the cap and the impingement plate at least partially define a cooling plenum therebetween. A plurality of angled cooling ports extends through the impingement plate to provide fluid communication into the cooling plenum. The plurality of cooling ports being set at an angle with respect to the longitudinal axis of the impingement plate within a plane defined between the longitudinal axis and a tangential axis of the impingement plate.

[0008] The present invention may also include a gas turbine having a compressor section at an upstream end of the gas turbine, a combustion section positioned downstream from the compressor section, and a turbine section positioned downstream from the combustion section. The combustion section includes a combustor that is in fluid communication with a fuel supply and a compressed air supply. The combustor has an end cover coupled to a casing that at least partially surrounds the combustor. A fuel nozzle extends downstream from the end cover. The fuel nozzle includes a burner tube component and a center nozzle assembly concentrically disposed within the burner tube component. The center nozzle assembly has an annular center body that at least partially defines a cooling air flow passage through the center nozzle assembly. The center body includes a downstream end. A premix flow passage is defined between the burner tube component and the center body assembly. A central recirculation zone for premix flame stabilization is defined in the area of combustion zone downstream from the center body. A Liquid fuel cartridge for dual fuel capability is located inside the center body. A tip assembly is disposed at the downstream end of the center body. The tip assembly has an impingement plate that extends radially across the downstream end of the center

body and a radially extending cap that is disposed coaxially downstream from the impingement plate. The impingement plate and the cap at least partially define a cooling plenum therebetween. The cap and the impingement plate at least partially define an insert passage that extends through the tip assembly. A plurality of cooling ports extends through the impingement plate to provide for fluid communication between the cooling air flow passage and the cooling plenum.

[0009] Those of ordinary skill in the art will better appreciate the features and aspects of such embodiments, and others, upon review of the specification.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] A full and enabling disclosure of the present invention, including the best mode thereof to one skilled in the art, is set forth more particularly in the remainder of the specification, including reference to the accompanying figures, in which:

[0011] FIG. **1** is a functional block diagram of an exemplary gas turbine within the scope of the present invention;

[0012] FIG. **2** is a simplified side cross-section view of an exemplary combustor according to various embodiments of the present invention;

[0013] FIG. **3** provides a cross-section perspective view of a dual fuel nozzle according to various embodiments of the present disclosure;

[0014] FIG. **4** provides an enlarged perspective view of a portion of the dual fuel nozzle as shown in FIG. **3**;

[0015] FIG. **5** provides an enlarged cross-section side view of a center body tip assembly as shown in FIG. **4**, according to at least one embodiment;

[0016] FIG. **6** provides a perspective top view of an impingement plate of the center body tip assembly as shown in FIG. **5**;

[0017] FIG. **7** provides a perspective bottom view of the impingement plate as shown in FIG. **6**;

[0018] FIG. **8** provides a cross-section front view of a portion of the impingement plate taken at line **8-8** as shown in FIG. **6**;

[0019] FIG. **9** provides a cross-section front view of the center body tip assembly as shown in FIG. **5**, according to at least one embodiment; and

[0020] FIG. **10** provides a perspective cross section view of the center body tip assembly as shown in FIG. **5**, according to another embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0021] Reference will now be made in detail to present embodiments of the invention, one or more examples of which are illustrated in the accompanying drawings. The detailed description uses numerical and letter designations to refer to features in the drawings. Like or similar designations in the drawings and description have been used to refer to like or similar parts of the invention. As used herein, the terms "first", "second", and "third" may be used interchangeably to distinguish one component from another and are not intended to signify location or importance of the individual components. The terms "upstream," "downstream," "radially," and "axially" refer to the relative direction with respect to fluid flow in a fluid pathway. For example, "upstream" refers to the direction from which the fluid flows, and "downstream" refers to the direction to which the fluid flows. Similarly, "radially" refers to the relative direction substantially perpendicular to the fluid flow, and "axially" refers to the relative direction substantially parallel to the fluid flow.

[0022] Each example is provided by way of explanation of the invention, not limitation of the invention. In fact, it will be apparent to those skilled in the art that modifications and variations can be made in the present invention without departing from the scope or spirit thereof. For instance, features illustrated or described as part of one embodiment may be used on another embodiment to yield a still further embodiment. Thus, it is intended that the present invention covers such modifications and variations as come within the scope of the appended claims and their equivalents. Although exemplary embodiments of the present invention will be described generally in the context of a fuel nozzle for a combustor incorporated into a gas turbine for purposes of illustration, one of ordinary skill in the art will readily appreciate that embodiments of the present invention may be applied to any combustor incorporated into any turbomachine and is not limited to a gas turbine combustor unless specifically recited in the claims.

[0023] Referring now to the drawings, wherein identical numerals indicate the same elements throughout the figures, FIG. **1** provides a functional block diagram of an exemplary gas turbine **10** that may incorporate various embodiments of the present invention. As shown, the gas turbine **10** generally includes an inlet section **12** that may include a series of filters, cooling coils, moisture separators, and/or other devices to purify and otherwise condition a working fluid (e.g., air) **14** entering the gas turbine **10**. The working fluid **14** flows to a compressor section where a compressor **16** progressively imparts kinetic energy to the working fluid **14** to produce a compressed working fluid **18** at a highly energized state.

[0024] The compressed working fluid **18** is mixed with a fuel from a fuel supply **20** to form a combustible mixture within one or more combustors **22**. The combustible mixture is burned to produce combustion gases **24** having a high temperature and pressure. The combustion gases **24** flow through a turbine **26** of a turbine section to produce work. For example, the turbine **26** may be connected to a shaft **28** so that rotation of the turbine **26** drives the compressor **16** to produce the compressed working fluid **18**. Alternately or in addition, the shaft **28** may connect the turbine **26** to a generator **30** for producing electricity. Exhaust gases **32** from the turbine **26** flow through an exhaust section **34** that connects the turbine **26** to an exhaust stack **36** downstream from the turbine **26**. The exhaust section **34** may include, for example, a heat recovery steam generator (not shown) for cleaning and extracting additional heat from the exhaust gases **32** prior to release to the environment.

[0025] The combustors **22** may be any type of combustor known in the art, and the present invention is not limited to any particular combustor design unless specifically recited in the claims. FIG. **2** provides a simplified cross-section side view of an exemplary combustor **22** that incorporates various embodiments of the present invention. As shown in FIG. **2**, a casing **40** and an end cover **42** combine to contain the compressed working fluid **18** flowing to the combustor **22** from the compressor **16** (FIG. **1**). The compressed working fluid **18** may pass through flow holes **44** in an annular flow sleeve **46** such as an impingement sleeve or a combustion flow sleeve to flow along the outside of a transition duct **48** and/or a liner **50** towards a head end **51** of the combustor **22**.

[0026] The head end **51** is at least partially defined by the end cover **42** and/or the casing **40**. The compressed working

fluid provides convective cooling to the transition duct **48** and/or to the liner **50**. At the head end **51**, the compressed working fluid **18** reverses in direction and flows through a plurality of fuel nozzles **52**. The fuel flows from the fuel supply system **20** through one or more fuel circuits (not shown) defined within the end cover **42** and into each or some of the fuel nozzles **52**. The fuel supply system **20** may be configured to provide a gaseous and/or a liquid fuel to the combustor **22**. The compressed working fluid **18** is mixed with the fuel as it passes through each of the plurality of fuel nozzles **52** to form the combustible mixture **54**. The combustible mixture **54** flows from each of the fuel nozzles **52** and into a combustion chamber **56** that is defined within the combustor **22** downstream from the fuel nozzles **52** for combustion. Each of the fuel nozzles **52** extends downstream from an inner surface **58** of the end cover **42**. In particular embodiments, each of the plurality of fuel nozzles **52** extends at least partially through a cap assembly **60** that extends radially and circumferentially within the combustor **22**.

[0027] FIG. **3** provides a cross-section perspective view of one dual fuel nozzle **70** of the plurality of fuel nozzles **52** as shown in FIG. **2**, according to at least one embodiment of the present disclosure. As shown in FIG. **3**, the dual fuel nozzle **70** generally includes an annular burner tube or outer shroud **72**, a center nozzle assembly **74** that is positioned concentrically within the burner tube **72**, and a premix flow passage **76** that is at least partially defined between the burner tube **72** and the center nozzle assembly **74**. In addition, the dual fuel nozzle **70** may include a plurality of swirler vanes **78** that extend radially between the burner tube **72** and the center nozzle assembly **74** to at least partially define the premix flow passage **76**.

[0028] In one embodiment, as shown in FIG. **2**, the swirler vanes **78** are oriented at a swirl angle within the premix flow passage **76** to impart swirl around a portion of the center nozzle assembly **74** to the compressed working fluid **18** as it flows through the premix passage **76** towards the combustion chamber **56** (FIG. **2**) of the combustor **22** (FIG. **2**). In particular embodiments, each or some of the plurality of swirler vanes **78** includes one or more fuel injection ports **80** that are in fluid communication with the premix flow passage **76**. An inlet **82** to the premix flow passage **76** is at least partially defined at or adjacent to an upstream end **84** of the burner tube **72**. The inlet **82** is positioned generally upstream from the plurality of swirler vanes **78**. An outlet **86** from the premix flow passage **76** is at least partially defined at or adjacent to a downstream end **88** of the burner tube **72**. The outlet **86** is positioned downstream from the plurality of swirler vanes **78**. The burner tube **72** may be manufactured as a singular component or may comprise of multiple shrouds coupled together to form the burner tube **72**.

[0029] As shown in FIG. **3** the center nozzle assembly **74** generally includes an annular center body **90** that extends along a longitudinal axis **92** of the fuel nozzle **70**, and a tip assembly **94** that is disposed at a downstream end **96** of the center body **90**. The center body **90** includes an upstream end **98** that may be configured to mount to the end cover **42** (FIG. **2**). For example, the center body **90** may at least partially define a gas fuel inlet **100** that extends through the upstream end **98**. The gas fuel inlet **100** being in fluid communication with the end cover **42** (FIG. **2**) and/or the fuel supply **20** (FIG. **1**). In addition, the center body **90** at least partially defines a gas fuel plenum **102**. The gas fuel plenum **102** being in fluid communication with the gas fuel inlet **100** and the fuel injection ports **80** of the plurality of swirler vanes **78**.

[0030] In particular embodiments, as shown in FIG. **3**, an opening **104** extends through the upstream end **98** of the center body **90**. An annular inner sleeve **106** circumferentially surrounds the opening **104** and extends at least partially through the center body **90** to further define the gas fuel plenum **102**. The inner sleeve **106** at least partially defines a cooling flow passage **108** within the center body **90** that extends from the upstream end **98** of the center body **90** to the tip assembly **94** at the downstream end **96** of the center body **90**. The cooling flow passage **108** is in fluid communication with at least one of the end cover **42** (FIG. **2**), a cooling medium supply (not shown) or the head end **51**. In particular embodiments, one or more cooling holes **110** extend through the center body **90** and/or through the swirler vanes **78** to provide for fluid communication between the head end **51** and the cooling flow passage to route a cooling medium such as the compressed air **18** into the cooling flow passage to cool the tip assembly **94** and/or the center body **90**.

[0031] FIG. **4** provides an enlarged perspective view of the tip assembly **94** including a liquid fuel cartridge **112**, herein referred to as the "LFC **112**" as shown in FIG. **3**, according to at least one embodiment of the present disclosure, and FIG. **5** provides a cross-section side view of the tip assembly **94** without the LFC **112** as shown in FIG. **4**. As shown in FIGS. **4** and **5**, the tip assembly **94** includes an annular impingement plate **114** that extends radially across the downstream end of the center body **90** with respect to the longitudinal axis **92** of the fuel nozzle **70**, an annular cap **116** disposed coaxially downstream from the impingement plate **114** with respect to the longitudinal axis **92** of the fuel nozzle **70**, and a cooling plenum **118** that is at least partially defined between the impingement plate **110** and the cap **116**.

[0032] As shown in FIGS. **4** and **5**, the cap **116** includes a cool side **120** separated from a hot side **122** and a radially outer portion or shroud **124** that circumferentially surrounds the cap **116**. In particular embodiments, the radially outer portion **124** extends between the impingement plate **114** and the cap **116** to at least partially define the cooling plenum **118**. The cap **116** at least partially defines a cooling flow outlet **126** that extends through the cap **116** between the cold side **120** and the hot side **122**. The cooling flow outlet **126** defines a flow path **128** from the cooling plenum **114** to route the compressed working fluid **18** out of the tip assembly **94**. The cooling flow outlet **126** is generally concentric with a longitudinal axis **130** of the tip assembly **94**. The longitudinal axis **130** of the tip assembly **94** is generally aligned with or congruent with the longitudinal axis **92** of the fuel nozzle assembly **70** when the tip assembly **94** is mounted to the fuel nozzle **70** center body **90**. In particular embodiments, the cooling flow outlet **126** converges between the cold side **120** and the hot side **122** to increase an exit swirl velocity of the compressed working fluid **18** as it exits the tip assembly **94**, thereby improving stabilization in recirculation zone downstream from the hot side **122** of the cap **116**.

[0033] FIG. **6** provides a top perspective view of the impingement plate **114**, and FIG. **7** provides a bottom perspective view of the impingement plate **114**. As shown in FIG. **5**, the impingement plate **114** includes an upstream surface **132** separated from a downstream surface **134**. In particular embodiments, as shown in FIGS. **5** through **7** the impingement plate **114** at least partially defines an insert passage **136** that extends through the impingement plate **114** from the upstream surface **132** through the downstream surface **134**. In particular embodiments, the insert passage **136** is disposed

concentrically within the impingement plate **114** with respect to the longitudinal axis **130** of the tip assembly **94** and/or with respect to the longitudinal axis **92** fuel nozzle **70**.

[0034] As shown in FIGS. **4** through **6**, a plurality of cooling ports **138** extend through the impingement plate **114** from the upstream surface **130** through the downstream surface **132**. As shown in FIGS. **4** and **5**, the cooling ports **138** define a flow path **140** into the cooling plenum **118**. In particular embodiments, as shown in FIGS. **4** and **5**, the cooling ports **138** are in fluid communication with the cooling flow passage **108** of the fuel nozzle **70**. In this manner, the compressed working fluid **18** is routed through the cooling ports **138** and into the cooling plenum **118**. The compressed working fluid **18** impinges onto the cool side **120** of the cap **116** to provide at least one of impingement, conductive or convective cooling to the cap **116**. The compressed working fluid **18** is then routed through the cooling flow outlet **126** towards the combustion zone **56** (FIG. **2**). As a result, thermal stresses on the tip assembly **94** particularly the hot side **122** of the cap **116** may be reduced, thereby improving the overall mechanical performance of the tip assembly **94** and/or the fuel nozzle **70**.

[0035] FIG. **8** provides a cross-section front view of a portion of the impingement plate as shown on FIG. **6** as taken at section **8-8**, according to at least one embodiment of the present invention. In particular embodiments, as shown in FIG. **8**, each or some of the cooling ports **138** are set at an angle **142** that is measured with respect to a line **144** that extends concentrically through each cooling port **138** from a longitudinal axis **146** of the impingement plate **114** within a plane that is defined between the longitudinal axis **146** and a tangential axis **148** of the impingement plate **114**. Each of the cooling ports **138** may be angled in the same direction circumferentially around the impingement plate **114**.

[0036] The angled cooling ports **138** impart swirl to the compressed working fluid **18** as it is routed through the cooling ports **138** and into the cooling plenum **118**, thereby creating a swirling flow of the compressed working fluid **18** within the cooling plenum **118**. In this manner, the compressed working fluid **18** will flow across a larger portion of the cool side **120** of the cap **116** to provide at least one of impingement, convective or conductive cooling to the cap **116** before the compressed working fluid **18** is routed through the cooling flow outlet **126** and out of the tip assembly **94**. As a result, a greater portion of a cooling capacity of the compressed working fluid **18** is utilized than if the compressed working fluid **18** is allowed to flow generally axially through the cooling plenum **118** such as where impingement only cooling is utilized. Therefore, the angled cooling ports **138** substantially increase the cooling effect of the compressed working fluid **18** with respect to the cap **116** of the tip assembly **94**, thereby reducing thermal stresses and improving the overall mechanical performance of the tip assembly **94** and/or the fuel nozzle **70**.

[0037] Referring back to FIG. **5**, in particular embodiments the tip assembly **94** further comprises an annular heat shield **150** that is concentrically disposed within the insert passage **136** of the impingement plate **114**. The heat shield **150** extends at least partially through the insert passage **136** towards the cooling flow outlet **126** of the cap **116**. The heat shield **150** at least partially defines the cooling plenum **118** and/or the flow path **128** from the cooling plenum **118**. The heat shield **150** may be seated into the insert passage **136** by an interference fit and/or may be welded or brazed to the liquid fuel cartridge **112**.

[0038] FIG. **9** provides a cross-section side view of the tip assembly **94** as shown in FIG. **5**, including the LFC **112** that extends at least partially through the tip assembly **94** according to at least one embodiment of the present disclosure. In particular embodiments, as shown in FIG. **3**, the LFC **112** extends at least partially through the cooling flow passage **108** defined within the center body **90** of the center nozzle assembly **74**. The LFC **112** is in fluid communication with the fuel supply **20** (FIG. **2**) and/or the end cover **42** (FIG. **2**) to provide a liquid fuel to the center nozzle assembly **74**. As shown in FIG. **9**, the LFC **112** extends through the impingement plate **114** and/or through the heat shield **150** towards the cooling flow outlet **126** of the cap **116**. In particular embodiments, the heat shield **150** and/or the insert passage **136** of the impingement plate **114** provides structural support to the LFC **112**. For example, the LFC **112** may be welded or brazed with the heat shield **150** and inserted with an interference fit within the impingement plate **114** thereby allowing for variances in thermal expansion between the various components and reducing the number of braze or weld joints within the center fuel nozzle assembly **74**.

[0039] The LFC **112** generally includes a pilot liquid fuel passage **152** and a main liquid fuel passage **153**. Liquid fuel and/or the compressed working fluid **18** may be routed through either or both the pilot liquid fuel passage **152** and/or the main liquid fuel passage **153** during different operation modes of the gas turbine. In one embodiment, a cartridge tip cooling plenum **154** is at least partially defined between the heat shield **150** and an injection tip portion **156** of the LFC **112**. Stagnation air in the tip cooling plenum **154** provides additional thermal insulation of the liquid fuel injection tip portion **156** from heating during liquid fuel operation. The injection tip portion **156** of the LFC **112** includes a plurality of fuel injection holes **158**.

[0040] The fuel injection holes **158** define a flow path through the injection tip portion **156** of the LFC **112** for injecting a liquid fuel into the combustion zone. In one embodiment, the fuel injection holes **158** define a flow path through the injection tip portion **156** of the LFC **112** for providing a portion of the compressed working fluid **18** as a cooling medium and/or as purge air to prevent ingestion of hot gases into injection tip **156** during gas only operation of the fuel nozzle **70**. In another embodiment, the heat shield **150** extends downstream thru the cooling flow outlet **126** so as to direct the compressed working fluid **18** that flows out of the outlet **126** across the fuel injection holes **158** to prevent ingestion of the hot combustion gases into the fuel injection holes **158** during gas only operation of the gas turbine without having to use the compressed working fluid **18** as a purge medium for the injection tip portion **156**. As a result, overheating of the fuel injection tip portion **156** during gas only operation of the fuel nozzle **70** may be prevented.

[0041] In particular embodiments, the dual fuel nozzle **70** (FIG. **3**) may be modified to operate as a gas only fuel nozzle. For example, as shown in FIG. **10**, a purge air bypass cartridge **160** may extend through the insert passage **136** of the impingement plate **114** and through the cooling flow outlet of the cap **116** in place of the LFC **112** thru the center body **90** and upstream of the end cover **42** (FIG. **2**). The purge air bypass cartridge **160** may include a plurality of cooling air passages **162** that provide for fluid communication between the cooling plenum **118** and a center cavity or cup **164** portion of the purge air bypass cartridge **160** and the cooling plenum

to provide for ventilation through the cap **116** when the purge air bypass cartridge **160** is installed instead of the LFC **112**.

[0042] In at least one embodiment, as shown in FIG. **9**, the LFC **112** extends through the heat shield **150** of the tip assembly **94**. A portion of the compressed working fluid **18** is routed from the cooling flow passage **108** through the cooling ports **138** of the impingement plate **114**. The cooling ports **138** are set at an angle **142** (FIG. **8**) to impart swirl to the compressed working fluid **18** flowing into the cooling plenum **118** and through the cooling flow outlet **126** in a common swirl direction or in a counter swirl direction with respect to the swirl imparted by the swirler vanes **78** (FIG. **3**) disposed within the premix flow passage **76** (FIG. **3**).

[0043] The swirling compressed working fluid **18** flows into the cooling plenum **118** of the tip assembly **94** and across the cool side **120** of the cap **116** to provide at least one of impingement, conductive convective cooling to the cap **116**. The swirling compressed working fluid **18** is then routed through the cooling flow outlet **126** by flow path **128** (FIG. **5**) to provide a generally optimized recirculation zone downstream from the hot side **122** of the cap **116**. As a result, coke deposits may be reduced on the hot side **122** of the cap **116**. In addition, optimization of a recirculation zone formation at the cap **116** provides robust flame stabilization at the tip assembly **94**. In another embodiment, a portion of the swirling compressed working fluid **18** flowing into the cooling plenum **118** and through the cooling flow outlet **126** is used to prevent ingestion of hot combustion gases into the fuel injection holes **158** in the injection tip portion **156** of the liquid fuel cartridge during gas only operation modes.

[0044] In at least one alternate embodiment, as shown in FIG. **10**, a purge air bypass cartridge **160** may be inserted through the insert passage **136** of the impingement plate **114**. In this configuration, the tip assembly **94** may be utilized to provide purge air such as the compressed working fluid **18** from the cooling flow passage **108** of the center body **90** to the cooling plenum **118** of the tip assembly **94** to provide uniform cooling of the cap **116** and to provide for robust flame stabilization generally adjacent to the hot side **122** of the tip assembly **94**. A portion of the swirling compressed working fluid **18** may be routed through the cooling air passages **162** of the purge air bypass cartridge **160** into the center cavity **164** of the purge air bypass cartridge **160** to provide cooling and exclusion of the hot gases from the center cavity **164** during gas only operation.

[0045] The invention as disclosed herein and as illustrated in FIGS. **3** through **10** provide various technological advantages and/or improvements over existing fuel nozzles having a tip assembly which incorporates a liquid fuel cartridge or LFC for dual fuel capability. For example, the swirling compressed working fluid remains in contact with the cool side of the cap for a longer period of time, thereby optimizing the cooling capacity of the compressed working fluid that flows across the cap. In addition, the swirling compressed working fluid exiting the cooling flow outlet provides for robust flame stabilization during gas fuel operation and provides a barrier to reduce hot gas ingestion back into the tip assembly and/or into the liquid fuel cartridge. In addition, the improved tip assembly prevents coke formation on the hot side of the cap, prevents overheating of the tip portion of the liquid fuel cartridge and improves the structural integrity of the fit between the liquid fuel cartridge and the tip assembly particularly during various thermal cycles of the combustor. Each or some of these advantages result in improved durability and performance of the fuel nozzle.

[0046] This written description uses examples to disclose the invention, including the best mode, and also to enable any person skilled in the art to practice the invention, including making and using any devices or systems and performing any incorporated methods. The patentable scope of the invention is defined by the claims, and may include other examples that occur to those skilled in the art. Such other examples are intended to be within the scope of the claims if they include structural elements that do not differ from the literal language of the claims, or if they include equivalent structural elements with insubstantial differences from the literal language of the claims.

What is claimed is:

1. A fuel nozzle for a combustor, the fuel nozzle comprising:

a. a burner tube component;

b. a center nozzle assembly concentrically disposed within the burner tube component, the center nozzle assembly having center body that at least partially defines a cooling air flow passage through the center nozzle assembly, the center body having a downstream end;

c. a premix flow passage defined between the burner tube component and the center nozzle assembly;

d. a tip assembly disposed at the downstream end of the center body, the tip assembly having an impingement plate that extends radially across the downstream end of the center body, and a radially extending cap disposed downstream from the impingement plate, the impingement plate and the cap at least partially defining a cooling plenum therebetween;

e. an insert passage that extends through the impingement plate;

f. a cooling flow outlet that extends through the cap, the cooling flow outlet being coaxially aligned with the insert passage; and

g. a plurality of cooling ports that extend through the impingement plate to provide for fluid communication between the cooling air flow passage and the cooling plenum.

2. The fuel nozzle as in claim **1**, wherein the plurality of cooling ports are angled with respect to a longitudinal axis of the impingement plate within a plane defined between the longitudinal axis and a tangential axis of the impingement plate to impart swirl about the longitudinal axis to a compressed working fluid that passes therethrough.

3. The fuel nozzle as in claim **2**, further comprising a plurality of swirler vanes that extend between the burner tube component and the center nozzle assembly within the premix flow passage, the swirler vanes being configured to impart swirl about a longitudinal axis of the fuel nozzle to a compressed working fluid that passes therethrough.

4. The dual fuel nozzle as in claim **3**, wherein the plurality of cooling ports are angled to impart swirl that is opposite to the swirl imparted by the swirler vanes.

5. The fuel nozzle as in claim **1**, wherein the cap includes a cool side and a hot side, the cooling flow outlet converging radially inward from the cool side towards the hot side of the cap.

6. The fuel nozzle as in claim **1**, further comprising an annular heat shield concentrically disposed within the insert passage.

7. The fuel nozzle as in claim 6, further comprising a liquid fuel cartridge that extends through the heat shield, the liquid fuel cartridge having a fuel injection tip portion that extends through the heat shield and at least partially through the cooling flow passage of the cap.

8. The fuel nozzle as in claim 7, further comprising a cartridge tip cooling plenum that is at least partially defined between the heat shield and the fuel injection tip portion of the liquid fuel cartridge.

9. The fuel nozzle as in claim 1, further comprising a purge air bypass cartridge concentrically disposed within the insert passage of the impingement plate, the purge air bypass cartridge having a plurality of cooling air holes that are in fluid communication with the cooling plenum.

10. A tip assembly for a fuel nozzle, comprising:

a. an annular impingement plate, the impingement plate at least partially defining an insert passage that extends concentrically through the impingement plate along a longitudinal axis of the diffusion tip assembly;

b. an annular cap disposed coaxially downstream from the impingement plate, the cap at least partially defining a cooling flow outlet, the cooling flow outlet being aligned with the insert passage, the cap having an outer portion that extends between the impingement plate and the cap, the outer portion, the cap and the impingement plate at least partially defining a cooling plenum therebetween; and

c. a plurality of angled cooling ports extending through the impingement plate to provide fluid communication into the cooling plenum, the plurality of cooling ports being set at an angle with respect to the longitudinal axis of the impingement plate within a plane defined between the longitudinal axis and a tangential axis of the impingement plate.

11. The tip assembly as in claim 10, wherein the cap includes a cool side and a hot side, the cooling flow outlet converging radially inward from the cool side towards the hot side of the cap.

12. The tip assembly as in claim 10, further comprising an annular heat shield concentrically disposed within the insert passage.

13. The tip assembly as in claim 12, wherein the heat shield extends through the cap.

14. The tip assembly as in claim 12, further comprising a liquid fuel cartridge that extends through the heat shield, the liquid fuel cartridge having a fuel injection tip portion that extends through the heat shield and at least partially through the cooling flow passage of the cap.

15. The tip assembly as in claim 14, further comprising a cartridge tip cooling plenum that is at least partially defined between the heat shield and the fuel injection tip portion of the liquid fuel cartridge.

16. The tip assembly as in claim 10, further comprising a purge air bypass cartridge concentrically disposed within the insert passage of the impingement plate.

17. A gas turbine comprising:

a. a compressor at an upstream end of the gas turbine, a combustor positioned downstream from the compressor, and a turbine positioned downstream from the combustor, the combustor being in fluid communication with a fuel supply and a compressed air supply, the combustor having an end cover coupled to a casing, the casing at least partially surrounds the combustor, a fuel nozzle extends downstream from the end cover, the fuel nozzle comprising:

i. a burner tube component;

ii. a center nozzle assembly concentrically disposed within the burner tube component, the center nozzle assembly having an annular center body that at least partially defines a cooling air flow passage through the center nozzle assembly, the center body having a downstream end;

iii. a premix flow passage defined between the burner tube component and the center body assembly;

iv. a tip assembly disposed at the downstream end of the center body, the diffusion tip assembly having an impingement plate that extends radially across the downstream end of the center body and a radially extending cap disposed coaxially downstream from the impingement plate, the impingement plate and the cap at least partially defining a cooling plenum therebetween, the impingement plate at least partially defining an insert passage and the cap at least partially defining a cooling flow outlet that is aligned with the insert passage; and

v. a plurality of angled cooling ports that extend through the impingement plate to provide for fluid communication between the cooling air flow passage and the cooling plenum.

18. The gas turbine as in claim 17, wherein the plurality of cooling ports of the impingement plate are arranged in an annular array around the insert passage.

19. The gas turbine as in claim 17, wherein the plurality of cooling ports of the impingement plate are angled with respect to a longitudinal axis of the impingement plate within a plane defined between the longitudinal axis and a tangential axis of the impingement plate to impart swirl about the longitudinal axis to a cooling medium that passes therethrough.

20. The gas turbine as in claim 17, wherein the tip further comprises an annular heat shield concentrically disposed within the insert passage and a liquid fuel cartridge that extends through the heat shield, the heat shield and the liquid fuel cartridge at least partially defining a cartridge tip cooling plenum therebetween.

* * * * *